


Always ahead for it's Quality,
Workability & Availability

Since : 1985 [®] [©]



Inverter Technology

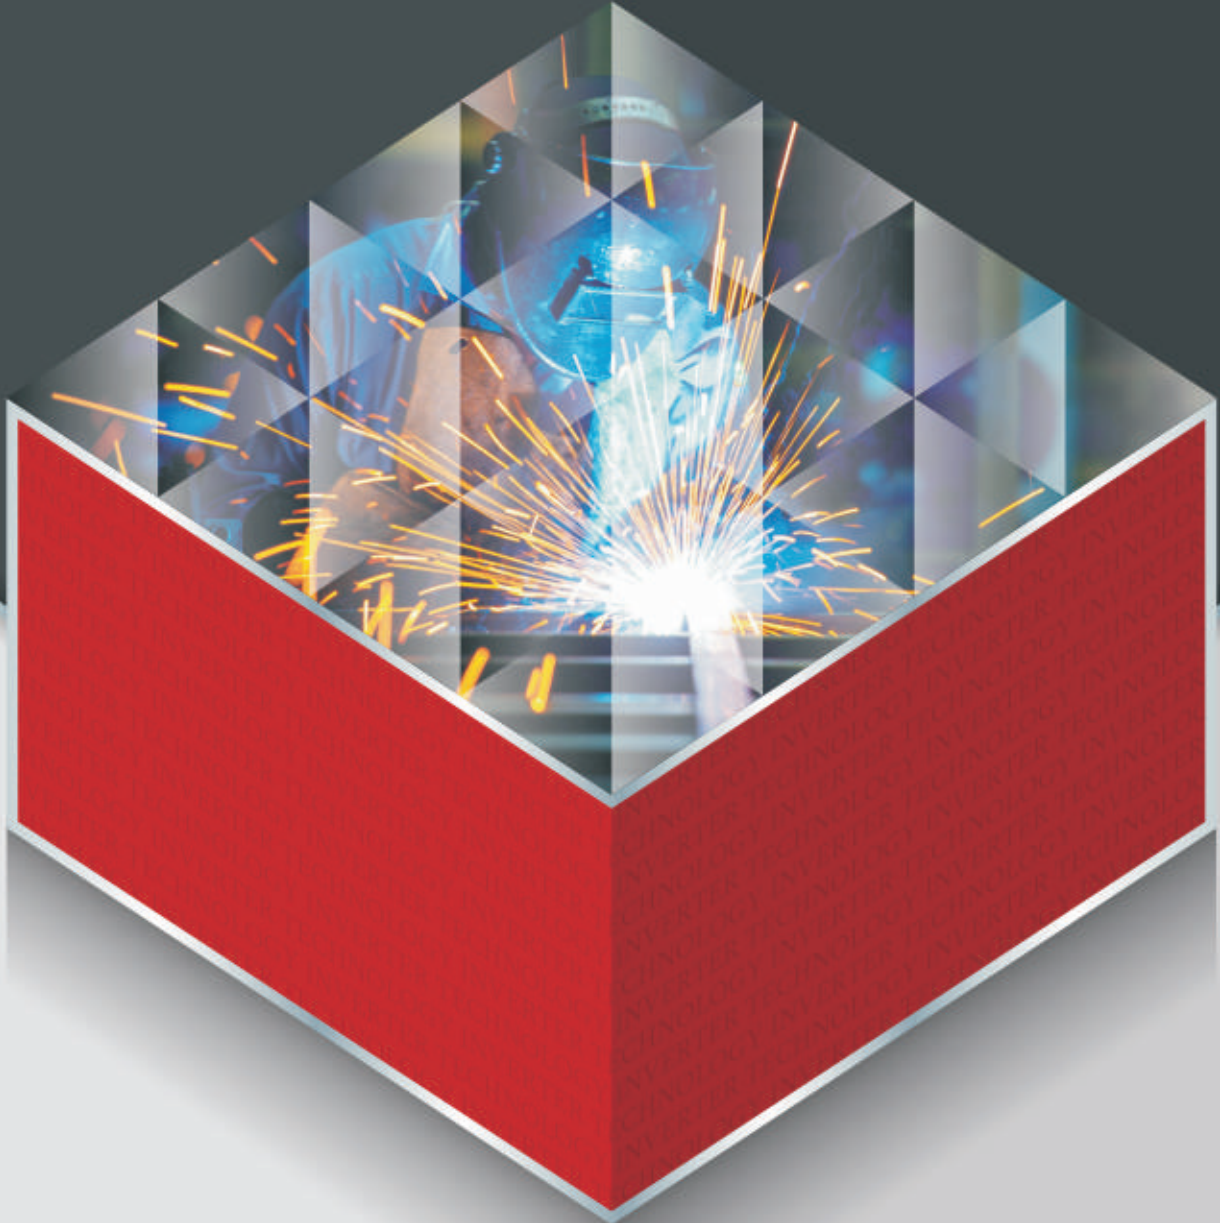

CE | AN ISO 9001-2015
CERTIFIED COMPANY



CORE PURPOSE

To create better tomorrow for ecosystem by providing distinct quality solutions so that they can enrich their lives.

CORE VALUE

- Customer First
- Transparency
- Quality As Committed
- Respect for All
- Winning Together





Since : 1985 [®] [©]

Rajdeep

Inverter Technology



ARC



MMA



TIG



MIG



CUT

Since : 1985 [®] [©]



Inverter Technology



ARC

ARC Welding Machine

Model	ARC 200 E
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	5.8
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	3.500
Dimension (mm)	375 x 150 x 300
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC 200 S
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	5.8
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	3.600
Dimension (mm)	375 x 150 x 300
Accessories	Welding Cable with Holder Earthing Cable with Clamp

Model	ARC 200 DT
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	5.8
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	3.100
Dimension (mm)	290 x 140 x 220
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC 200 G
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	6.0
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	4.000
Dimension (mm)	380 x 160 x 320
Accessories	Welding Cable with Holder Earthing Cable with Clamp

E-Mail : rajlaxmiwelding@yahoo.com



ARC Welding Machine



ARC

Since : 1985 [®] [©]



Inverter Technology

Model	ARC 200 T
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	6.8
IGBT / MOSFET	MOSFET
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	5.00
Dimension (mm)	380 x 155 x 305
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC 250 T
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	10.2
IGBT / MOSFET	MOSFET
Welding Rod Size can be use	1.6 - 4.0
Weight (Kg.)	5.700
Dimension (mm)	380 x 155 x 305
Accessories	Welding Cable with Holder Earthing Cable with Clamp

Model	ARC 300 G
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 300
Rated Input Power (KVA)	10.2
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 4.0
Weight (Kg.)	8.300
Dimension (mm)	480 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC 315 G
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 315
Rated Input Power (KVA)	10.8
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 4.0
Weight (Kg.)	11.700
Dimension (mm)	490 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Since : 1985 [®] [©]



Inverter Technology



ARC

ARC Welding Machine



Model	ARC 400 G
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	30 - 400
Rated Input Power (KVA)	13.9
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 5.0
Weight (Kg.)	13.300
Dimension (mm)	500 x 245 x 440
Accessories	Welding Cable with Holder Earthing Cable with Clamp

Model	ARC 415 G
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	30 - 415
Rated Input Power (KVA)	15.6
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 5.0
Weight (Kg.)	19.000
Dimension (mm)	520 x 275 x 465
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC 400 ij
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	30 - 400
Rated Input Power (KVA)	18.5
IGBT / MOSFET	IGBT Module
Welding Rod Size can be use	1.6 - 5.0
Weight (Kg.)	23.700
Dimension (mm)	580 x 290 x 540
Accessories	Welding Cable with Holder Earthing Cable with Clamp



ARC MMA Welding Machine



MMA

Since : 1985 [®] [©]



Inverter Technology

Model	ARC MMA 200 T
Input Voltage (V)	220 V - 415 V \pm 15% (1-2 Phase)
Output Current (A)	20 - 200
Rated Input Current (A)	18 (1-PH) & 10 (2-PH)
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 3.15
Weight (Kg.)	5.000
Dimension (mm)	380 x 155 x 305
Accessories	Welding Cable with Holder Earthing Cable with Clamp



Model	ARC MMA 250 T
Input Voltage (V)	220 V - 415 V \pm 15% (1-2 Phase)
Output Current (A)	20 - 250
Rated Input Current (A)	21 (1-PH) & 12 (2-PH)
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 4.0
Weight (Kg.)	5.300
Dimension (mm)	380 x 155 x 305
Accessories	Welding Cable with Holder Earthing Cable with Clamp

Model	ARC 400 HD
Input Voltage (V)	220 V - 415 V \pm 15% (1-2-3 Phase)
Output Current (A)	20 - 400
Rated Input Current (A)	37 (1-PH), 12.8 (2-PH) & 12.8 (3-PH)
IGBT / MOSFET	IGBT
Welding Rod Size can be use	1.6 - 5.0
Weight (Kg.)	10.200
Dimension (mm)	485 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp





TIG

TIG / ARC Welding Machine



Model	TIG 200 T
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	20 - 200
Rated Input Power (KVA)	5.7
IGBT / MOSFET	MOSFET
Welding Rod Size can be use (ARC)	1.6 - 3.15
Weight (Kg.)	6.400
Dimension (mm)	400 x 160 x 295
Accessories	Welding Cable with Holder Earthing Cable with Clamp Tig Torch

Model	TIG 300 A
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 300
Rated Input Power (KVA)	5.9
IGBT / MOSFET	MOSFET
Welding Rod Size can be use (ARC)	1.6 - 4.0
Weight (Kg.)	13.600
Dimension (mm)	500 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp Tig Torch



Model	TIG 400 A
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 400
Rated Input Power (KVA)	8.5
IGBT / MOSFET	MOSFET
Welding Rod Size can be use (ARC)	1.6 - 4.0
Weight (Kg.)	21.000
Dimension (mm)	570 x 310 x 515
Accessories	Welding Cable with Holder Earthing Cable with Clamp Tig Torch



MIG / ARC Welding Machine



MIG

Since : 1985 [®] [©]



Model	MIG 250 FS
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	30 - 250
Rated Input Power (KVA)	7.9
IGBT / MOSFET	MOSFET
Welding Wire Size can be use	0.8 - 1.0 mm
Weight (Kg.)	13.800
Dimension (mm)	500 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp Mig Torch & Co2 Regulator



Model	MIG 250 F
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	30 - 250
Rated Input Power (KVA)	10.0
IGBT / MOSFET	MOSFET
Welding Wire Size can be use	0.8 - 1.0 mm
Weight (Kg.)	13.400
Dimension (mm)	500 x 210 x 370
Accessories	Welding Cable with Holder Earthing Cable with Clamp Mig Torch & Co2 Regulator

Model	MIG 400 ij
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	30 - 400
Rated Input Power (KVA)	17.0
IGBT / MOSFET	IGBT Module
Welding Wire Size can be use	0.8 - 1.0 - 1.2 mm
Weight (Kg.)	26.300
Dimension (mm)	550 x 290 x 545
Accessories	Welding Cable with Holder Earthing Cable with Clamp Mig Torch & Co2 Regulator





CUT

Plasma Cutting Machine

Model	CUT 40
Input Voltage (V)	220 V ± 15% (1-Phase)
Output Current (A)	10 - 40
Rated Input Power (KVA)	6.2
IGBT / MOSFET	MOSFET
Max. Cutting (mm)	8 mm
Weight (Kg.)	6.300
Dimension (mm)	405 x 155 x 300
Accessories	Earthing Cable with Clamp Cutting Torch & Flow Meter



Model	CUT 60
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	10 - 60
Rated Input Power (KVA)	8.9
IGBT / MOSFET	MOSFET
Max. Cutting (mm)	18 mm
Weight (Kg.)	13.300
Dimension (mm)	510 x 210 x 370
Accessories	Earthing Cable with Clamp Cutting Torch & Flow Meter

Model	CUT 100
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 100
Rated Input Power (KVA)	13.8
IGBT / MOSFET	IGBT Module
Max. Cutting (mm)	30 mm
Weight (Kg.)	31.300
Dimension (mm)	600 x 315 x 600
Accessories	Earthing Cable with Clamp Cutting Torch & Flow Meter



Model	CUT 160
Input Voltage (V)	415 V ± 15% (3-Phase)
Output Current (A)	20 - 160
Rated Input Power (KVA)	35.0
IGBT / MOSFET	IGBT Module
Max. Cutting (mm)	50 mm
Weight (Kg.)	76.500
Dimension (mm)	700 x 360 x 935
Accessories	Earthing Cable with Clamp Cutting Torch & Flow Meter



Since : 1985 ®©

Rajdeep

Inverter Technology



E-Mail : rajlaxmiwelding@yahoo.com

Web. : www.welding-transformer.com

Rajlaxmi Transformer Products

4/10, Atika Industrial Area, Dhebar Road (south), Near Khodiyar Motor Garage,

RAJKOT - 360 002, (India)

Phone : +91-281-2361937 / 2365621 Mobile : +91-9978975261